


Drill & Rivet Mounting Machine

DRMDOUBLE

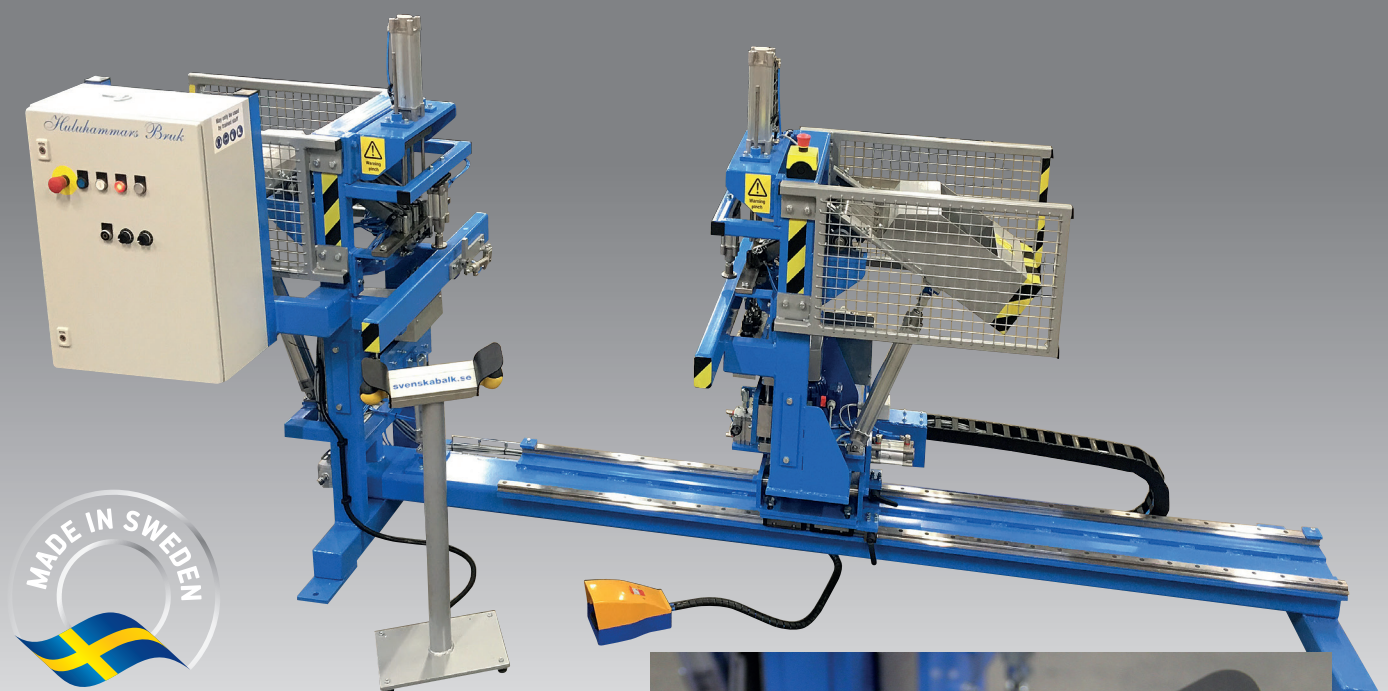

The DRM Double is built on a strong machine tripod with one fixed and one moving unit on a slide for simple adjustment of material length, 543 - 2400 mm + - 5 mm, for maximal pressure between hinge and board.

Drilling and riveting occurs simultaneously in both ends. Self control of the feeder from the magazine with auto feed and rivet press.

The machine is complete with manual pneumatic stop and continuous feed. Controlled by a foot pedal and "Switchballs" for operators security. The DRM Double machine is delivered with complete electrical and pneumatic equipment.



Manual operation is activated by using the "Switchballs" by hands.

S VENSKA
B ALK
S YSTEM

Steering: Manual

Working time: 7 sec/detail

Operator: 1

Aktiebolaget
Huluhammars Bruk

Huluhammars Bruk • Bruksvägen 6 • 562 41 Taberg • Sweden • Phone +46 36 650 40
E-mail: info@svenskabalk.se • www.svenskabalk.se