


# Rivet Machine

## **RM**DOUBLE

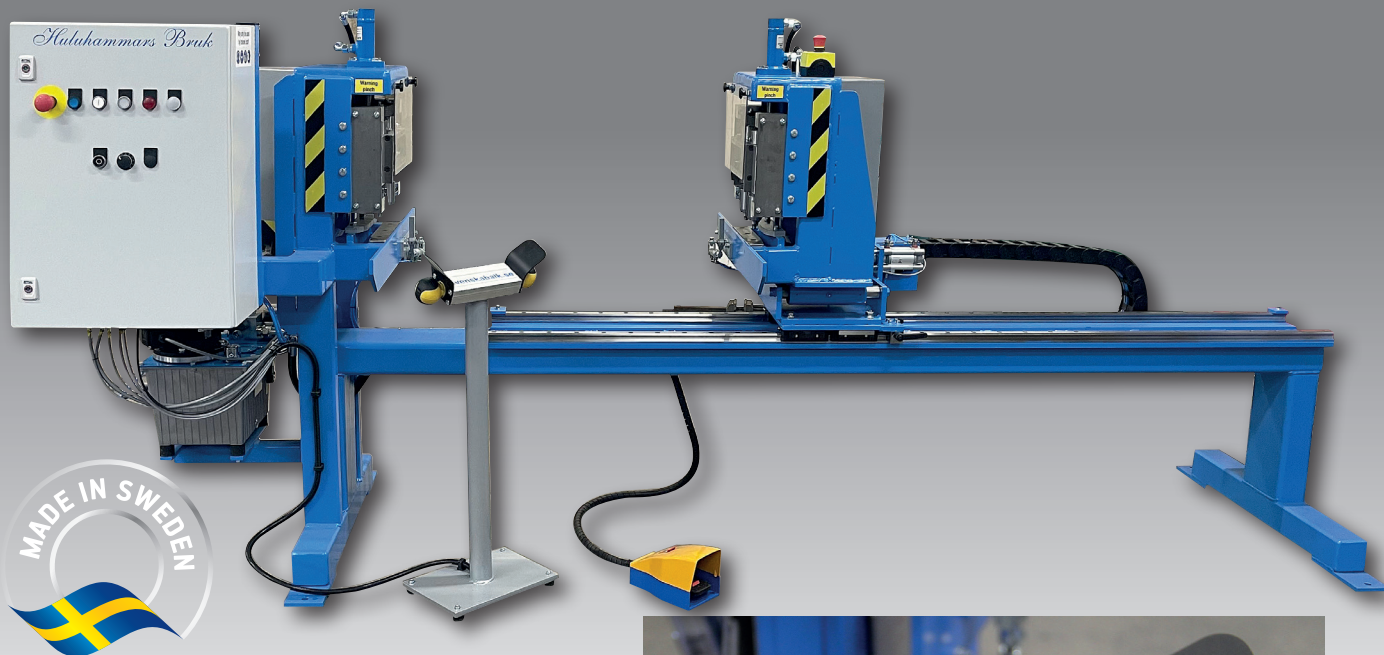

The RM Double is built on a strong machine tripod with one fixed and one moving unit on a slide for simple adjustment of material length, 543 - 2400 mm  $\pm$  5 mm, with control of material  $\pm$  5 mm for the orientation of the rivet. The rivet unit has long life heavy duty bearings for the spindle. The rivet design is adjustable between 3 - 10 sec.

The machine is manual with continuous feed controlled by a by a footpedal and "Switchballs" for operators security. The RM Double machine is delivered with complete electrical and pneumatic equipment.



Manual operation is activated by using the "Switchballs" by hands.

**S** VENSKA  
**B** ALK  
**S** YSTEM

Steering: Manual

Working time: 7 sec/detail

Operator: 1

*Aktiebolaget*  
*Huluhammars Bruk*

Huluhammars Bruk • Bruksvägen 6 • 562 41 Taberg • Sweden • Phone +46 36 650 40  
E-mail: info@svenskabalk.se • www.svenskabalk.se